



REAL TIME



Anti-clone  
Guarantee



Remote access



Hearing  
aid loop



Hands free



**IPGUARD  
SMART APP**


AVAILABLE FOR DOWNLOAD



App Store



Google Play

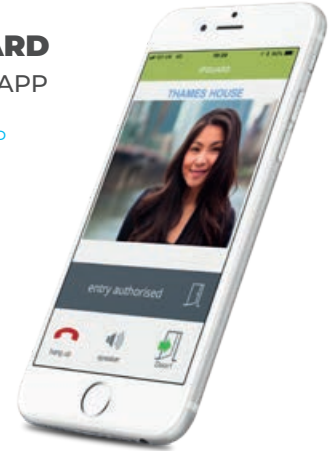

Police Preferred Specification

**KEY FEATURES...**

- HD focus-free colour camera
- TFT colour screen 3.5 inches
- Anti-vandal proximity reader, illuminated
- Hearing aid loop
- Integrated 4G modem antenna
- Equality Act 2010 Compliant
- Mobile access via smart app

4G/IP/GSM

VISITOR DOOR ENTRY

| SPECIFICATIONS   | STAINLESS STEEL ●   |
|--|---|
| REFERENCES   | TP4G-11X  |
| <b>MECHANICAL CHARACTERISTICS</b>                              |   |
| <b>Facia only dimensions (HxWxD)</b>                           | 350 x 160 x 3 mm  |
| <b>Flush facia &amp; flange dimensions (HxW)</b>               | 390 x 200 mm  |
| <b>Flush backbox dimensions (HxWxD)</b>                        | 335 x 142 x 60 mm   |
| <b>Hooded surface dimensions (HxWxD)</b>                       | 355 x 165 x 80DB x 110DT mm   |
| <b>Material</b>  | Stainless Steel 316, brushed  |
| <b>Protection rating</b>                                       | IK09 / IP54   |
| <b>ELECTRICAL CHARACTERISTICS</b>                              |   |
| <b>Power</b>   | 12 V DC / 2A max (whilst communicating via 4G)  |
| <b>Relay</b>   | 2 relays 5 Amp rated NO/NC programmable   |
| <b>Temperature</b>   | Operating -20°C to 60°C / Storage -40°C to 85°C   |
| <b>FEATURES</b>  |   |
| <b>High Definition colour camera, adjustable 2 axis gimbal</b> | Wide angle with white light emission & optical IR filter for true colour night video (even @ 0 lux)   |
| <b>Screen</b>  | TFT colour 3.5"   |
| <b>Proximity reader</b>  | Anti-vandal makrolon, illuminated   |
| <b>Keypad</b>  | 12 large (15.6mm dia) backlit braille keys  |
| <b>Capacity</b>  | 3000 names / flats, 2000 keypad codes   |
| <b>Inputs</b>  | 2 no programmable   |
| <b>Smartphone App</b>  | IPGUARD APP on Google Play (Android), App Store (APPLE)   |
| <b>Programming</b>   | WWW.BATICONNECT.COM available 24/7/365 real time  |
| <b>Mobile access</b>   | Open door via app on smart devices from anywhere, at any time.  |
| <b>Advanced features</b>                                       | Customisable welcome screen – Backlight compensation – Proximity key & radio transmitter ANTI-CLONE guarantee – Smartphone access – Hearing aid loop – Hands free |

**IPGUARD MINI PLUS 4G/IP/GSM**

|                     |   |
|---------------------|---|
| <b>TP4G-11X</b>     | IPGUARD 4G/IP PRO, flush  |
| <b>BTP04-S</b>      | Surface housing for IPGUARD PRO, BS316 stainless steel, brushed. Dims (mm) 355H x 165W x 80DB/100DT               |
| <b>POSTC</b>        | Post car height   |
| <b>EVE196-X3-RS</b> | Control unit, 1 door, 3000 prox capacity, real-time BATICONNECT CLOUD management, anti-clone protection guarantee |
| <b>AR122</b>        | 12VDC/2A , Din Rail, for locking  |
| <b>AR125</b>        | 12VDC/5A , Din Rail, for IPGUARD  |
| <b>ZAN1055</b>      | Remote aerial with 5m cable, only required if 4G signal to the panel is low                                       |
| <b>IGSM4G</b>       | 4G/IP router with ZAN1055 and AR122, only required if 4G aerial needs to go on the roof                           |

**IPGUARD PRO 4G/IP/GSM SMART TECHNOLOGY**



IPGUARD PRO  
Surface



EVE196-X3-RS  
proximity reader control unit



ZAN1055  
Connects directly to IPGUARD. Always required if 4G signal to panel is low but recommended to get best signal available.



IGSM4G/IP router modem  
**Only required** if 4G aerial needs to go on roof, max 80 metres from IPGUARD (usually in top floor riser), ZAN1055 and AR122 PSU included.



AR122 (12VDC/2A)  
for locking



AR125 (12VDC/5A)  
for IPGUARD